

# Back Bar Refrigeration FBB Series



- FBB-59
- FBB-69
- FBB-79
- FBB-95
- FBB-59G
- FBB-69G
- FBB-79G
- FBB-95G
- FBB-59S
- FBB-69S
- FBB-79S
- FBB-95S
- FBB-59SG
- FBB-69SG
- FBB-79SG
- FBB-95SG

Item # \_\_\_\_\_

## Standard Features

- Our Back Bar units are designed with durability and strength along with feature rich standards uncommon in the industry today.
- Refrigeration system is a free flowing air system throughout the box to ensure "ICE COLD" products at all times with a side mount evaporator system.
- Heavy duty 18 gauge stainless steel top, durable stainless steel covered corner floor and reinforced bottom door frame to protect your long term investment.
- Unit comes standard as first door with 2 flat shelves and balance with 2 fixed bottle rail shelves per door for greater merchandising and inventory control.
- Greater usable capacity with the ability for 3 tall boys high and ability to take the beer the full depth of the box.
- Field interchangeable doors from Solid to Glass or Glass to Solid to adapt to ever changing needs.
- Units come with compressor mounted on the left side with service friendly slide out rail system.
- Incandescent interior light per door underneath the mullion to protect itself from normal operations and brightly shine and keep the light on your bottles.
- NSF approved for bottle and pre packed goods.



FBB-59



FBB-79G



FBB-95S

### Options & Accessories

- 3" castors with reinforced rail
- 6" Adjustable stainless steel legs.
- Additional flat shelves
- Additional shelves w/ fixed bottle rails.
- 220 volts / 50 cycles / 1 phase



\*Conforms to UL & NSF-7 standards

Back Bar	Model*	Doors	Capacity 12 Oz can	Capacity cu ft	Kegs	Shlvs	Amp	HP	Volt	NEMA Plug	Cabinet Dimensions			Shipping	
											W	D**	H	(Wt. Cubes)	
	FBB-59(S)(G)	2	852	19.4	3	4	6.6	1/3	115	5-15P	59 1/2" (1512 mm)	28 5/8" (726 mm)	36 1/4" (936 mm)	343 (156 kg)	51 (1.44 m³)
	FBB-69(S)(G)	2	1014	23.7	3	4	6.6	1/3	115	5-15P	69-5/8" (1768 mm)	28 5/8" (726 mm)	36 1/4" (936 mm)	370" (168 kg)	59 (1.67 m³)
	FBB-79(S)(G)	3	1092	28.2	4	6	6.9	1/3	115	5-15P	80" (2032 mm)	28 5/8" (726 mm)	36 1/4" (936 mm)	396 (180 kg)	68 (1.93 m³)
	FBB-95(S)(G)	3	1302	35	5	6	7.2	1/3	115	5-15P	95 1/2" (2426mm)	28 5/8" (726 mm)	36 1/4" (936 mm)	429 (195 kg)	81 (2.01 m³)

\* (S) Stainless steel units, (G) Glass door units.

\*\* Depth does not include 1" bumper.

### Specifications Back Bar

#### Construction

Heavy duty stainless steel top, 18 gauge. Black vinyl front, sides and back. (S) Models have stainless steel front and sides. Galvanized back panel. Interior constructed of heavy duty galvanized steel walls with coved corner NSF approved stainless steel floor. Door is comprised of heavy duty black vinyl steel. (S) Models are stainless steel. (G) Models are a dual pane glass with black frame, (SG) Models are a dual pane glass with aluminum frame. Provided with lock per door, magnetic door gaskets, removable without tools. Door openings have a plastic breaker strips to retard condensate formation.

Unit comes complete with a 1-1/2" CFC-Free polyurethane insulation, foamed in place.

#### Refrigeration System

Self-contained capillary tube system using environmentally friendly (CFC Free) R-134a refrigerant. Front breathing compressor on left side for built-in applications. Evaporator coil is mounted to interior left side above the compressor. Large fan motor and fan blades for greater air flow.

Automatic condensate evaporator, no drain connection required. Evaporator condensate has been plumbed to a condensate pan located in the compressor housing. Access for the condensing unit behind the front grill, slides out for easy cleaning and maintenance.

Cabinets are designed to maintain temperatures between 33° F to 38° F in the interior cabinet.

#### Lights

Interior fluorescent light underneath the mullion.

#### Shelving


Two adjustable epoxy coated shelves provided per door standard. One door with standard flat shelves, balance with fixed bottle rails.

#### Others


Unit is supplied standard with an 8' cord and plug (Nema 5-15p).

#### Warranty


3 year parts and labor warranty plus 2 additional year compressor warranty. (Continental U.S.A. & Canada only).




FBB-59(S)(G)  
Front View




FBB-69(S)(G)  
Front View




FBB-79(S)(G)  
Front View




FBB-59(S)(G)  
Top View




FBB-69(S)(G)  
Top View




FBB-79(S)(G)  
Top View

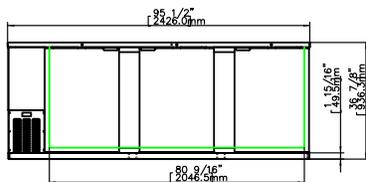

FBB-95(S)(G)  
Front View

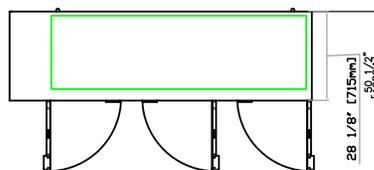

FBB-95(S)(G)  
Top View



FBB-59/69/79/95(S)(G)  
Common View

The manufacturer reserves the rights to modify materials and specifications without notice.

