



Glass Frosters / Chillers

FGF Series



- FGF-24
- FGF-36
- FGF-50
- FGF-24S
- FGF-36S
- FGF-50S

Item # _____

Standard Features

- Our slide top units are designed with durability and strength along with feature rich standards uncommon in the industry today.
- Refrigeration system is a free flowing air system throughout the box to ensure "ICE COLD" products at all times.
- Heavy duty 18 gauge stainless steel top with anodized aluminum bottle rails.
- Stylish wear resistant black vinyl on steel finish front, sides and back. (S) Models have stainless steel front and sides.
- Standard with incandescent interior lighting to provide full visibility to your bottle and door locks to protect your inventory.
- Heavy duty adjustable bin dividers, epoxy coated.
- Units come with compressor mounted on the right side with service friendly slide out rail system. Drain is located in the back compressor housing.



Options & Accessories

- 220 volts / 50 cycles / 1 phase



FGF-24S



FGF-36



FGF-50

Glass Frosters	Model*	Doors	Shelves	Amp	HP	Voltage	NEMA Plug	Cord Length	Capacity 8" Mugs	Capacity 10 Oz Mugs	Cabinet Dimensions			Shipping (Wt. Cubes)	
											W	D**	H		
	FGF-24(S)	1	6	8.0	1/6	115/60/1	5-15P	8"	35	96	24-5/8" (625 mm)	26-7/8" (683 mm)	35-3/8" (886 mm)	172 (78 kg)	13 (.37 m ³)
	FGF-36(S)	1	6	8.0	1/3	115/60/1	5-15P	8"	60	162	36-5/8" (929 mm)	26-7/8" (683 mm)	35-3/8" (886 mm)	234 (106 kg)	19.7 (.56 m ³)
	FGF-50(S)	2	6	8.0	1/3	115/60/1	5-15P	8"	84	234	49-5/8" (1260 mm)	26-7/8" (683 mm)	35-3/8" (886 mm)	269 (122 kg)	27.5 (.76 m ³)

* (S) Stainless steel units
** Depth does not include 1" bumper.

13105 NW 47th Ave. Miami FL 33054
 Tollfree: (866) 463 2467 Ph: (305) 779 0170 Fax: (305) 779 0173
www.fagorcommercial.com

TOGETHER WE EVOLVE



Glass Frosters / Chillers

FGF Series



Specifications Glass Frosters

Construction

Heavy duty stainless steel top, 18 gauge. Black vinyl front, sides and back. (S) Models have stainless steel front, sides and back. Interior constructed of heavy duty galvanized steel walls with coved corner galvanized floor.

Lids are heavy duty foamed in place with stainless steel finish. Lids are provided with locks per lid. Unit comes complete with a 1-1/2" CFC-Free polyurethane insulation, foamed in place.

Refrigeration System

Self-contained capillary tube system using environmentally friendly (CFC Free) R-134a

refrigerant. Front breathing compressor on right side for built-in applications. Evaporator coil is mounted to interior back panel. Large fan motor and fan blades for greater air flow. Automatic condensate evaporator, drain connection required.

Evaporator condensate has been plumbed to a condensate pan located in the compressor housing. Access for the condensing unit behind the front grill, slides out for easy cleaning and maintenance. Cabinets are designed to maintain temperatures between 0° F to -7° F in the interior cabinet.

Lights

Interior fluorescent light.

Shelving


Adjustable epoxy coated bin dividers provided per unit

Others

Unit is supplied standard with an 8' cord and plug (Nema 5-15p).

Warranty

3 year parts and labor warranty plus 2 additional year compressor warranty. (Continental U.S.A. & Canada only).

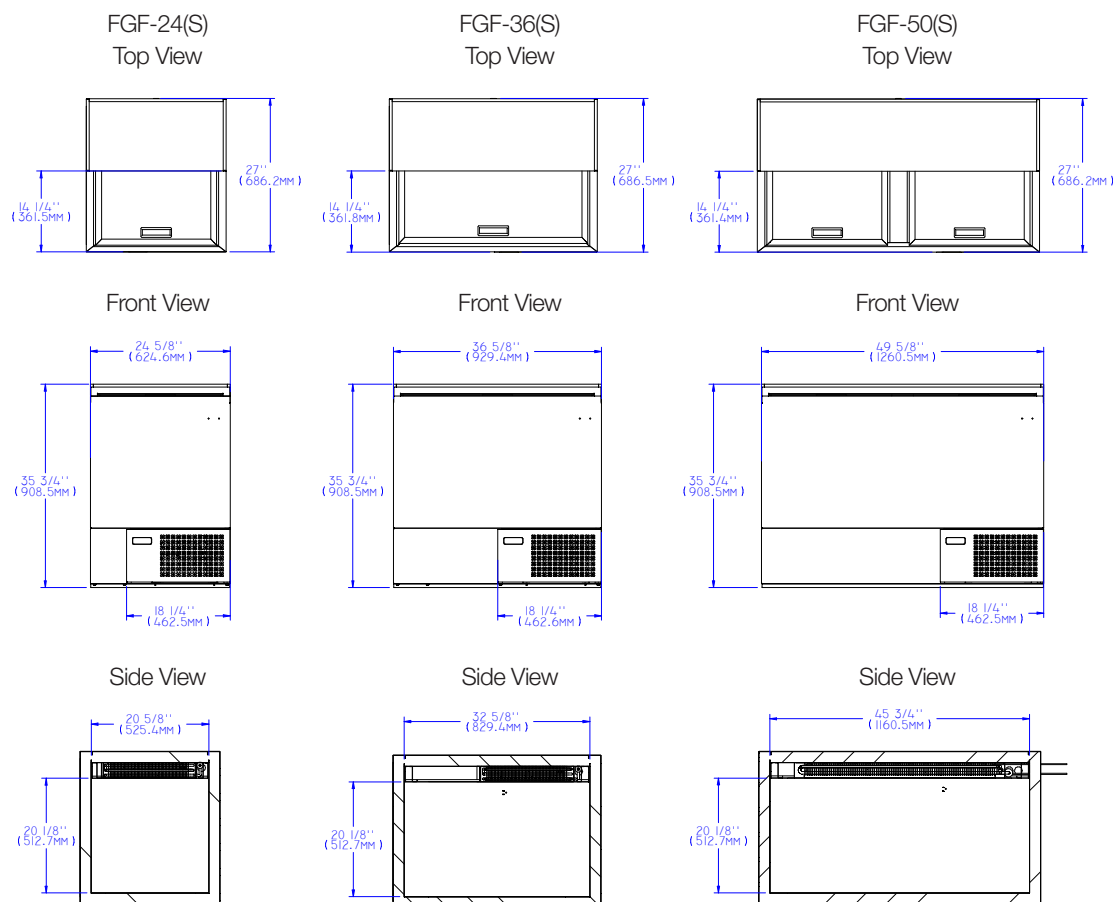

The manufacturer reserves the rights to modify materials and specifications without notice.

13105 NW 47th Ave. Miami FL 33054
 Tollfree: (866) 463 2467 Ph: (305) 779 0170 Fax: (305) 779 0173
www.fagorcommercial.com

Manuals
 Parts breakdown
 Customer Service

